
RN: 99AYP010

## Appendix C (Continued)

## Section III. Drawing

223 LBS OF
PACKAGED SOLIDS
SHALL BE TIGHTLY
PACKED TOGETHER
VOID SPACE FILLED
BY FIBERBOARD PADS

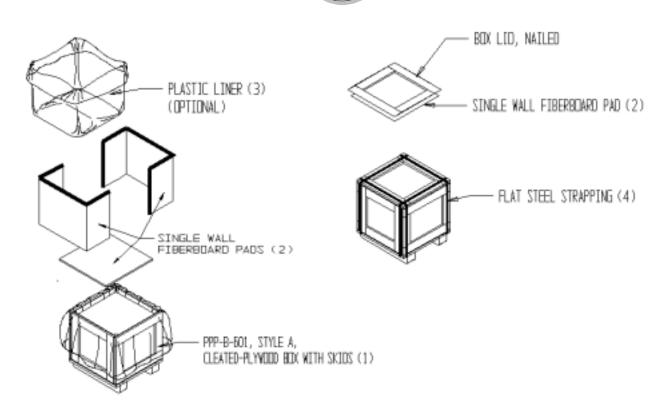

ITEM	DESCRIPTION 99AYP010
NOTE	LITHIUM BATTERIES SHALL BE PACKAGED IAW MIL-B-49430, i.e., EACH IN A
	CHIPBOARD/PAPERBOARD BOX, SEALED IN A POLYETHYLENE BAG
1	PPP-B-601, STYLE A, CLEATED-PLYWOOD BOX WITH SKIDS,
	21 x 21 x 16 INCHES (ID)
2	PADS, FIBERBOARD (4-PCS. REQUIRED), V3c, IAW ASTM D 4727
3	PLASTIC LINER, 4-MIL POLYETHYLENE BAG, 44 x 48 INCHES (OPTIONAL)
4	34 x .023 IN. STEEL STRAPPING, FLAT, TYPE 1 REGULAR DUTY, FINISH A, IAW
	ASTM D 3953, 2 GIRTHWISE BANDS, 2 LENGTHWISE BANDS